

## SCOPE :

This specification applies to the Pb Free high current type SMD Common mode filter  
for MCM-9070FH0-SERIES-□□


## PRODUCT IDENTIFICATION

**MCM-9070F H0 - 301** - □□

①      ②      ③      ④      ⑤

- ① Product Code
- ② Dimensions Code
- ③ AEC-Q200 Code
- ④ Impedance Code
- ⑤ Inner Control Code

## (1) SHAPES AND DIMENSIONS

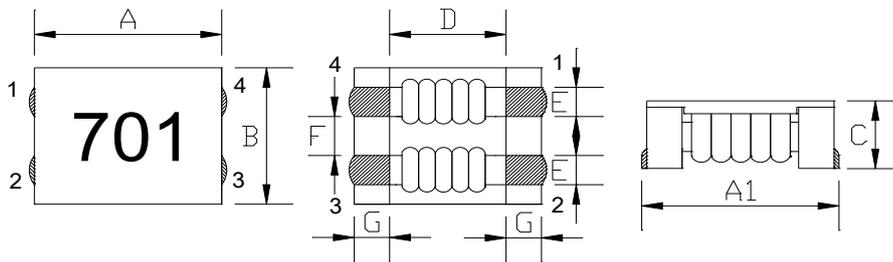

A:	9.0 ±0.5	mm
A1:	9.5 ±0.5	mm
B:	7.0 ±0.5	mm
C:	4.8 Max.	mm
D:	5.7 Typ.	mm
E:	1.5 ±0.2	mm
F:	2.0 ±0.2	mm
G:	1.7 ±0.2	mm

## (2) ELECTRICAL SPECIFICATIONS

SEE TABLE 1

### TEST INSTRUMENTS

- Z : HP 4291B IMPEDANCE ANALYZER (or equivalent)
- RDC : CHROMA MODEL 16502 MILLIOHMMETER (or equivalent)
- I.R : CHROMA MODEL 19073 AC/DC/IR HIPOT TESTER (or equivalent)

## (3) CHARACTERISTICS

(3)-1 Operate temperature range ..... -40°C ~ +155°C

(Including self temp. rise)




**MAG.LAYERS**

**TABLE 1**

MAGLAYERS PT/NO.	Impedance( $\Omega$ ) at 100MHz		Resistance RDC( $\Omega$ ) Max.(1 line)	Rated Current (A) Max.	Insulation Resistance (M $\Omega$ ) Min.	Rated Voltage (V)Max.
	Min.	Typ.				
MCM-9070FH0-301-□□	225	300	6m	6.0	10	80
MCM-9070FH0-501-□□	450	600	8m	5.5	10	80
MCM-9070FH0-701-□□	500	700	10m	5.0	10	80
MCM-9070FH0-102-□□	750	1000	13m	4.0	10	80
MCM-9070FH0-222-□□	1700	2200	60m	2.5	10	80
MCM-9070FH0-272-□□	2000	2700	86m	2.0	10	80

Rated Current : Based on temperature rise ( $\Delta T : 40^{\circ}\text{C TYP.}$ )


## CHARACTERISTICS(REFERENCE)

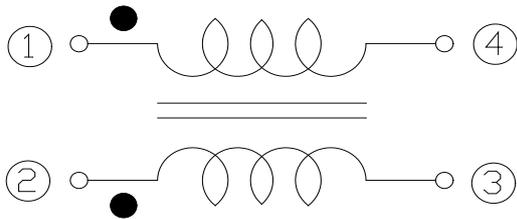

**(4) RELIABILITY TEST METHOD  
MECHANICAL**

TEST ITEM	SPECIFICATION	TEST DETAILS
Solder ability	The product shall be connected to the test circuit board by the fillet (the height is 0.2mm).	Apply cream solder to the printed circuit board . Refer to clause 8 for Reflow profile.
Resistance to Soldering heat (reflow soldering)	There shall be no damage or problems.	<p>Temperature profile of reflow soldering</p> <p>The specimen shall be passed through the reflow oven with the condition shown in the above profile for 1 time. The specimen shall be stored at standard atmospheric eric conditions for 1 hour, after which the measurement shall be made.</p>
Terminal strength	The terminal electrode and the ferrite must not damaged.	<p>Solder a chip to test substrate , and then laterally apply a load 9.8N in the arrow direction.</p>
Strength on PC board bending	The terminal electrode and the ferrite must not damaged.	<p>Solder a chip to test substrate and then apply a load.</p> <p>Test board:FR4 100×40×1mm Fall speed:1mm/sec. Dimensions in mm</p>
High temperature resistance	<p>Impedance:Within±20% of the initial value.</p> <p>Insulation resistance and DC resistance on the specification(refer to clause 2-1) shall be met.</p> <p>The terminal electrode and the ferrite must not damaged.</p>	<p>After the samples shall be soldered onto the test circuit board,the test shall be done.</p> <p>Measurement : After placing for 24 hours min.</p> <p>Temperature : +155±2°C</p> <p>Applied voltage : Rated voltage</p> <p>Applied current : Rated current</p> <p>Testing time : 500±12 hours</p>
MSL	<p>No apparent damage</p> <p>Fulfill the electrical spec. after test.</p>	85°C · 85%RH FOR 1000 HOURS

**(4) RELIABILITY TEST METHOD**  
**MECHANICAL**


TEST ITEM	SPECIFICATION	TEST DETAILS
Humidity resistance	Impedance: Within $\pm 20\%$ of the initial value. Insulation resistance and DC resistance on the specification (refer to clause 2-1) shall be met. The terminal electrode and the ferrite must not be damaged.	After the samples shall be soldered onto the test circuit board, the test shall be done. Measurement : After placing for 24 hours min. Temperature : $+60 \pm 2^\circ\text{C}$ , Humidity : 90 to 95 %RH Applied voltage : Rated voltage Applied current : Rated current Testing time : $500 \pm 12$ hours
Thermal shock	Impedance: Within $\pm 20\%$ of the initial value. Insulation resistance and DC resistance on the specification (refer to clause 2-1) shall be met. The terminal electrode and the ferrite must not be damaged.	 <p>The diagram shows a temperature profile for one cycle. It starts at <math>-40^\circ\text{C}</math> for 30 minutes, then rises to <math>+155^\circ\text{C}</math> in 30 seconds, stays at <math>+155^\circ\text{C}</math> for 30 minutes, and then returns to <math>-40^\circ\text{C}</math> in 30 seconds. The total duration of one cycle is 1 minute.</p>
Low temperature storage	Impedance: Within $\pm 20\%$ of the initial value. Insulation resistance and DC resistance on the specification (refer to clause 2-1) shall be met. The terminal electrode and the ferrite must not be damaged.	After the samples shall be soldered onto the test circuit board, the test shall be done. Measurement : After placing for 24 hours min. Temperature : $-40 \pm 2^\circ\text{C}$ Testing time : $500 \pm 12$ hours
Vibration	Impedance: Within $\pm 20\%$ of the initial value. Insulation resistance and DC resistance on the specification (refer to clause 2-1) shall be met. The terminal electrode and the ferrite must not be damaged.	After the samples shall be soldered onto the test circuit board, the test shall be done. Frequency : 10 to 55 Hz Amplitude : 1.52 mm Dimension and times : X , Y and Z directions for 2 hours each.
Solderability	New solder More than 75%	Flux (rosin, isopropyl alcohol (JIS-K-1522)) shall be coated over the whole of the sample before hard, the sample shall then be preheated for about 2 minutes in a temperature of $130 \sim 150^\circ\text{C}$ and after it has been immersed to a depth 0.5mm below for $3 \pm 0.2$ seconds fully in molten solder M705 with a temperature of $245 \pm 5^\circ\text{C}$ . More than 75% of the electrode sections shall be covered with new solder smoothly when the sample is taken out of the solder bath.
High Temp with Load Test	After reliability test $\Delta L$ within $\pm 20\%$	1000hrs. at rated operating temperature (e.g. $155^\circ\text{C}$ part can be stored for 1000hrs. @ $155^\circ\text{C}$ . Same applies for $125^\circ\text{C}$ and $105^\circ\text{C}$ . Unpowered. Measurement at $24 \pm 4$ hours after test conclusion.

## (5) LAND DIMENSION (Ref.)

PCB: GLASS EPOXY t=1.6mm

### (5)-1 LAND PATTERN DIMENSIONS


(STANDARD PATTERN) Unit : mm

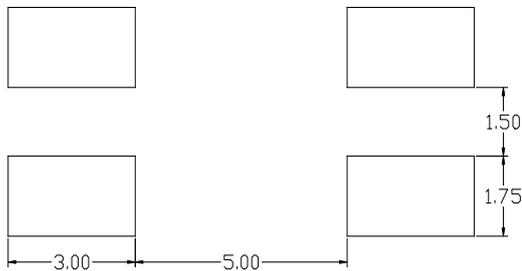

## (6) TEST EQUIPMENT


### (6)-1 Impedance

Measured by using HP4291B RF Impedance Analyzer.

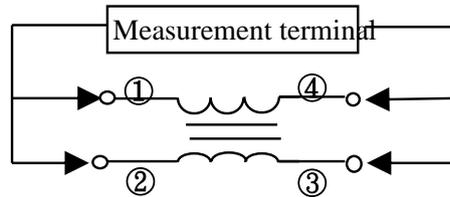

### (6)-2 DC Resistance


Measured by using Chroma 16502 milliohm meter.

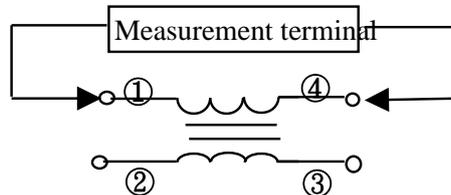

### (6)-3 Insulation Resistance

Measured by using Chroma 19073


Measurement voltage : 50v , Measurement time : 60 sec.

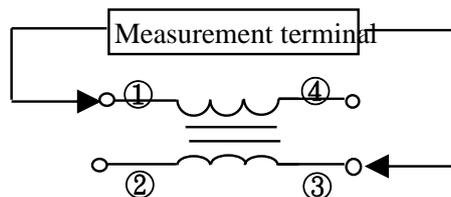


MAG.LAYERS

## (6) PACKAGING


### (6)-1 CARRIER TAPE DIMENSIONS (mm)

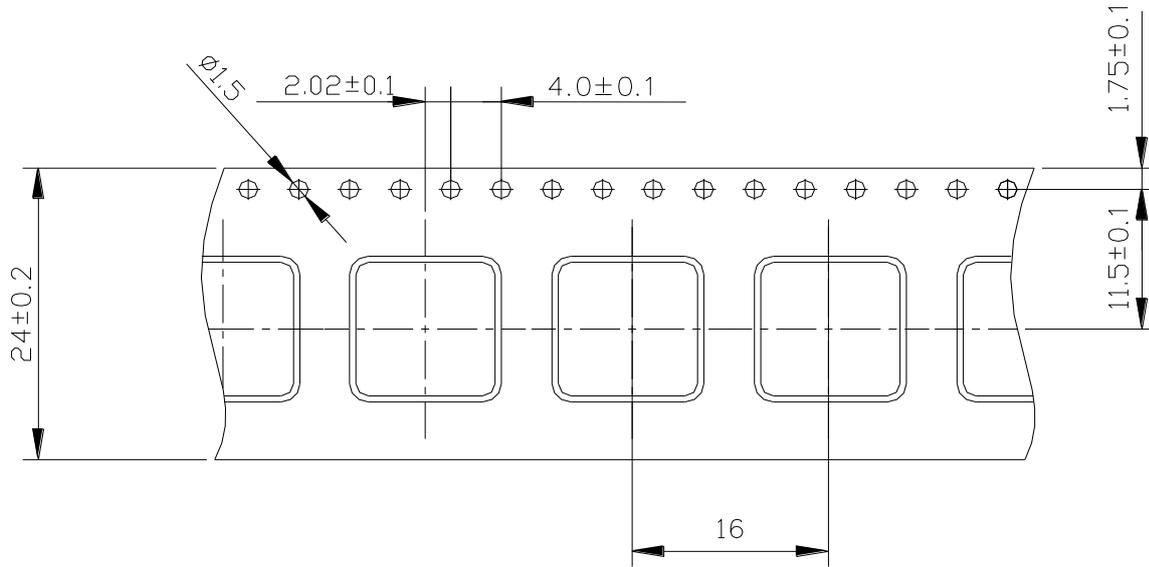

### (6)-2 TAPING DIMENSIONS (mm)

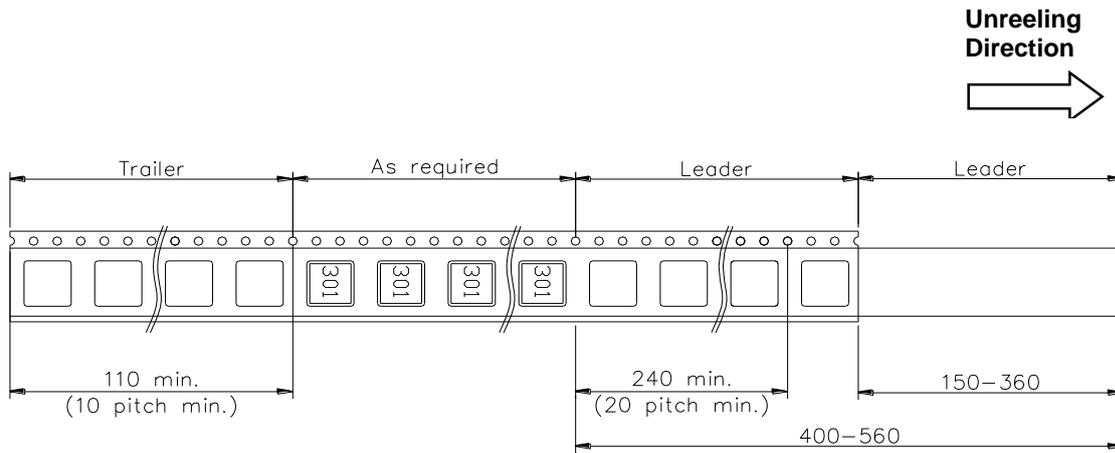

### (6)-3 REEL DIMENSIONS (mm)

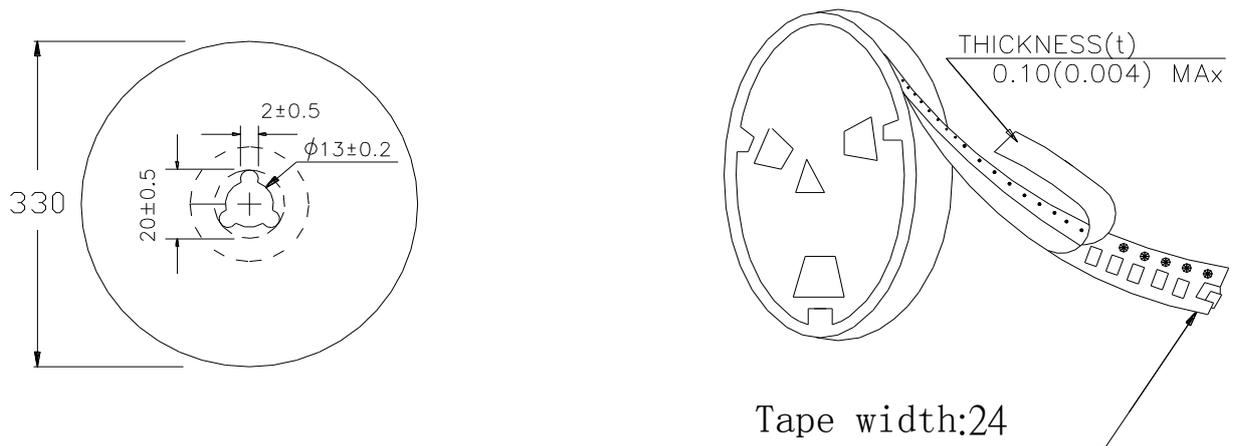

### (6)-4 QUANTITY

700 pcs/Reel

The products are packaged so that no damage will be sustained.

Please note that the contents may change without any prior notice due to reasons such as upgrading.



**MAG.LAYERS**

# TYPICAL ELECTRICAL CHARACTERISTICS

