

SCOPE :

This specification applies to the Pb Free Wire Wound Ferrite Chip Inductors
for MWLD-252018-SERIES


PRODUCT IDENTIFICATION

MWLD -252018 - 1R1 J

① ② ③ ④

- ① Product Code
- ② Dimensions Code
- ③ Inductance Code
- ④ Tolerance Code

(1) SHAPES AND DIMENSIONS(mm)

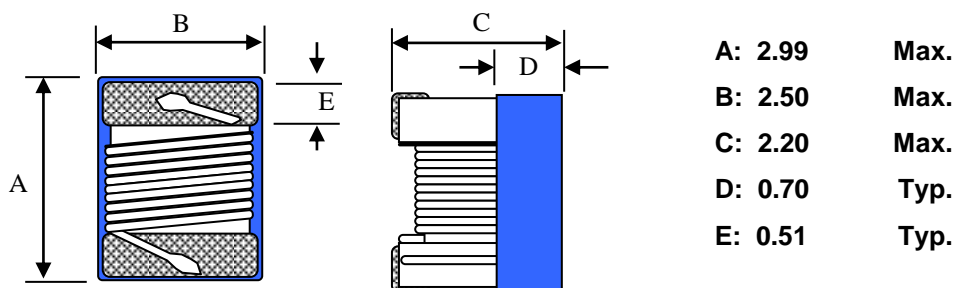

(2) ELECTRICAL SPECIFICATIONS

SEE TABLE 1

TEST INSTRUMENTS

L,Q : HP 4291B IMPEDANCE ANALYZER (or equivalent)

SRF : ENA E5071B NETWORK ANALYZER (or equivalent)

RDC : CHROMA MODEL 16502 MILLIOHMMETER (or equivalent)

(3) CHARACTERISTICS

(3)-1 Operate temperature range $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

(Including self temp. rise)

(3)-2 Storage temperature range $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$



MAG.LAYERS

TABLE 1

MAGLAYERS PT/NO.	Inductance L(uH)	Percent Tolerance	L/Q Freq. (MHz)	Quality Typ.	SRF (MHz)Min.	DCR (Ω) Max.	Isat (mA) Typ.	Irms (mA) Max.	Color Coding		
									1st	2nd	3rd
MWLD-252018-R90□	0.9	K	2.5	25	300	0.100	1400	1300	White	Black	Brown
MWLD-252018-1R1□	1.1	K	2.5	24	275	0.105	1300	1200	Brown	Brown	Red
MWLD-252018-1R3□	1.3	J,K	2.5	24	220	0.110	1200	1100	Brown	Orange	Red
MWLD-252018-1R5□	1.5	J,K	2.5	22	210	0.125	1100	1000	Brown	Yellow	Red
MWLD-252018-1R9□	1.9	J,K	2.5	22	165	0.140	1000	1000	Brown	White	Red
MWLD-252018-2R2□	2.2	J,K,M	2.5	21	75	0.155	950	950	Red	Red	Red
MWLD-252018-2R7□	2.7	J,K	2.5	22	57	0.190	800	900	Red	Violet	Red
MWLD-252018-3R3□	3.3	J,K	2.5	21	54	0.210	750	800	Orange	Orange	Red
MWLD-252018-3R9□	3.9	J,K	2.5	21	50	0.220	700	800	Orange	White	Red
MWLD-252018-4R7□	4.7	J,K	2.5	27	48	0.435	700	650	Yellow	Violet	Red
MWLD-252018-5R8□	5.8	J,K	2.5	21	33	0.280	550	750	Green	Gray	Red
MWLD-252018-6R8□	6.8	J,K	2.5	20	28	0.315	500	700	Blue	Gray	Red
MWLD-252018-8R2□	8.2	J,K	2.5	20	24	0.395	500	650	Gray	Red	Red
MWLD-252018-100□	10.0	J,K	2.5	22	20	0.480	450	550	Brown	Black	Orange


※ 1. Please specify the inductance tolerance, J($\pm 5\%$), K($\pm 10\%$), M($\pm 20\%$)

2. L/Q Test OSC @200mV.

3. Isat For Inductance drop 10% from its value without current.



4. Irms for a 40°C temperature rise from 25°C ambient with current

5. Color coding is not necessarily same position,
and Color coding non-directional printing.



(4) RELIABILITY TEST METHOD

MECHANICAL

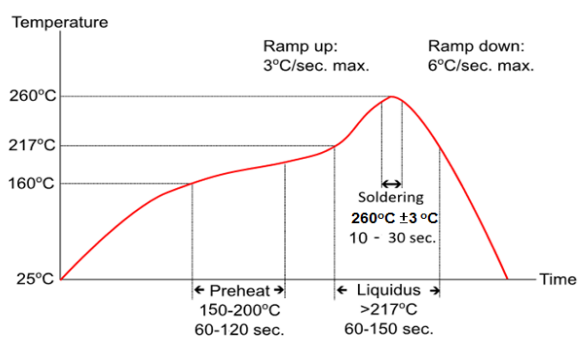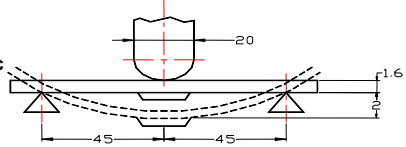TEST ITEM	SPECIFICATION	TEST DETAILS
Solder ability	The electrodes shall be at least 90% covered with new solder coating	Refer to J-STD-002 Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 245±5°C (Pb-Free) Immersion Time: 4±1sec
Resistance to Soldering heat (reflow soldering)	There shall be no damage or problems. Inductance change shall be within ±10%. Q change: within ±30% of initial value	Refer to MIL-STD-202 Method 210 Temperature profile of reflow soldering 
Terminal strength	The terminal electrode and the ferrite must not be damaged.	Refer to AEC-Q200-006 Test device shall be soldered on the substrate Force 0.5lbs for 60±1 seconds for 0201 series Force 1lbs for 60±1 seconds for 0402 series Force 2lbs for 60±1 seconds for 0603 series Force 1.8Kg for 60±1 seconds for the other series.
Board Flex	The terminal electrode and the ferrite must not be damaged.	Refer to AEC-Q200-005 Test device shall be soldered on the substrate Substrate Dimension: 100x40x1.6mm Deflection: 2.0mm Keeping Time: 60sec 
High temperature resistance (Storage)	Appearance: No damage (for microscope of CASTOR MZ-420X) Inductance change shall be within ±10%. Q change: within ±30% of initial value	Refer to MIL-STD-202 Method 108 Temperature: 125±3°C / Relative Humidity: 0% Time: 100hrs Measured after exposure in the room condition for 24hrs
Biased Humidity	Appearance: No damage (for microscope of CASTOR MZ-420X) Inductance change shall be within ±10%. Q change: within ±30% of initial value	Refer to MIL-STD-202 Method 103 Temperature: 85±2°C Relative Humidity: 85% / Time: 100hrs Measured after exposure in the room condition for 24hrs

(4) RELIABILITY TEST METHOD

MECHANICAL

TEST ITEM	SPECIFICATION	TEST DETAILS
Thermal shock	Appearance:No damage (for microscope of CASTOR MZ-420X)Inductance change shall Inductance change shall be within $\pm 10\%$. Q change:within $\pm 30\%$ of initial value	Refer to JESD Method JA-104 Total cycles: 100 cycles Temperature Cycling Test Conditions : -40 to +125 °C -40 °C Soak Mode Condition : 30 minutes 125 °C Soak Mode Condition : 30 minutes Measured after exposure in the room condition for 24hrs
Low temperature storage	There shall be no damage or problems. Inductance change shall be within $\pm 10\%$. Q change:within $\pm 30\%$ of initial value	After the samples shall be soldered onto the test circuit board,the test shall be done. Measurement : After placing for 24 hours min. Temperature : -40 $\pm 2^{\circ}\text{C}$ Testing time : 100 hours
Vibration	There shall be no damage or problems. Inductance change shall be within $\pm 10\%$. Q change:within $\pm 30\%$ of initial value	Refer MIL-STD-202 Method 204 Vibration waveform: Sine waveform Vibration frequency: 10Hz~2000Hz Vibration acceleration: 5g Sweep rate: 0.764386octave/minute Duration of test: 12 cycles each of 3 orientations, 20 minutes for each cycle Vibration axes: X, Y & Z
Resistance to Solvent	There must be no change in appearance or obliteration of marking	Refer to MIL-STD-202 Method 215 Inductors must withstand 6 minutes of alcohol or water.
Operational Life	No apparent damage Inductance change shall be within $\pm 10\%$.	Refer to MIL-STD-202 Method 108 Temperature: 125 $\pm 3^{\circ}\text{C}$ Applied Current : Rated Current Time: 100hrs Measured after exposure in the room condition for 24hrs




(5) RECOMMENDED SOLDERING CONDITIONS


(Please use this product by reflow soldering)

(5)-1 RECOMMENDED FOOTPRINT

Unit: mm

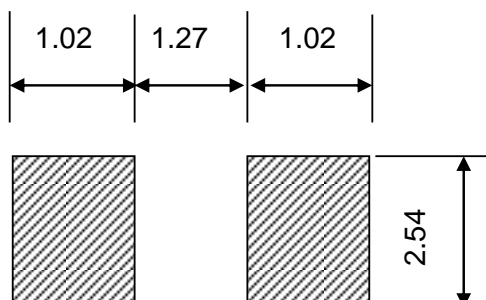

(5)-2 RECOMMENDED REFLOW PATTERN

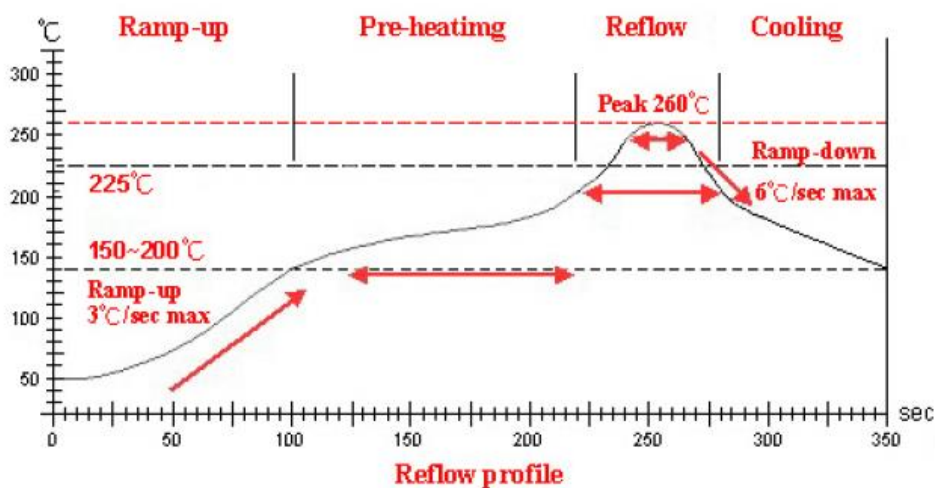

Lead-Free(LF)

Refer to J-STD-020C


Item	Ramp-up	Pre-heating	Reflow	Peak Temp.	Cooling
Temp. scope	R.T.~150°C	150°C~200°C	225°C	260±5°C	Peak Temp.~150°C
Time result	—	60~180 Sec.	20~60 Sec.	5~10 Sec.	—

NOTE:

1. Re-flow possible times:with in 2 times
2. Nitrogen adopted is recommended while in re-flow

(6) PACKAGING

(6)-1 CARRIER TAPE DIMENSIONS (mm)

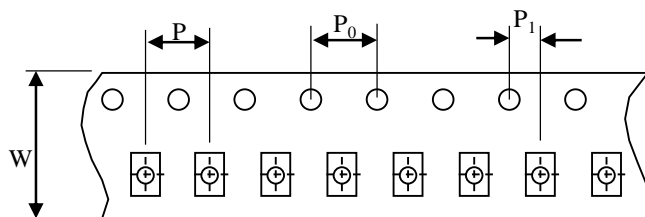

W : 8.0 mm


P : 4.0 mm

P0 : 4.0 mm


P1 : 2.0 mm

(6)-2 TAPING DIMENSIONS (mm)

There shall not continuation more than two vacancies of the product.

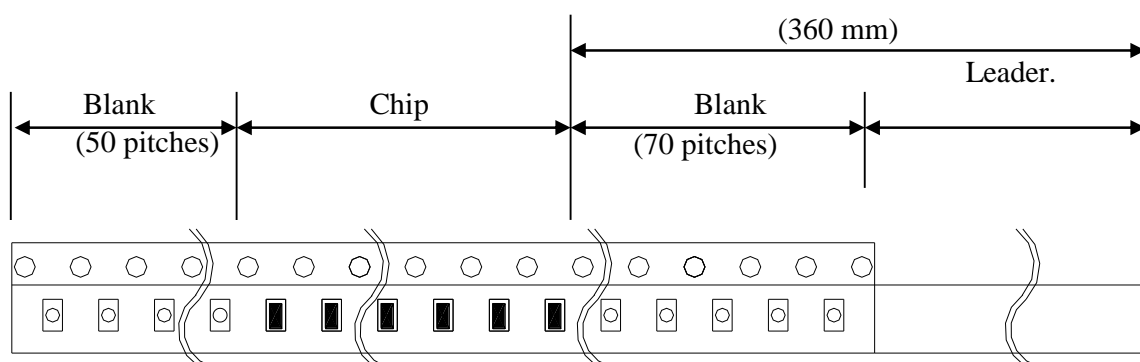

(6)-3 REEL DIMENSIONS

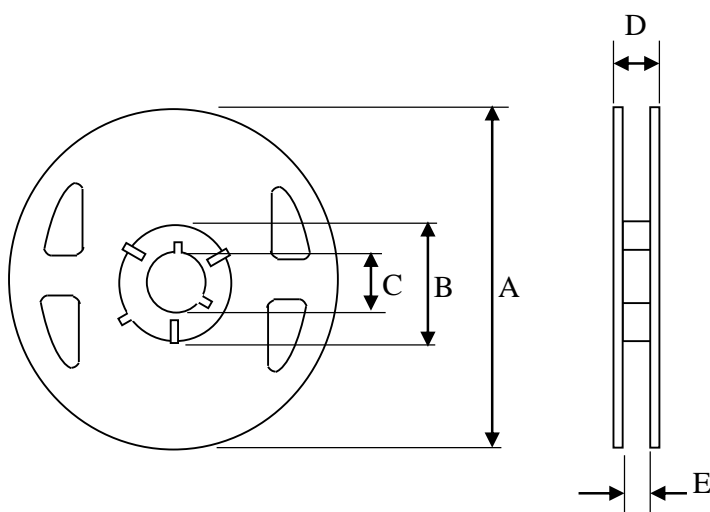

A : 178 mm

B : 60.0 mm

C : 13.0 mm

D : 12.0 mm


E : 9.0 mm



MAG.LAYERS

(6)-4 COVER TAPE PEEL STRENGTH

The force for tearing off cover tape is 10 to 100 grams in the arrow direction

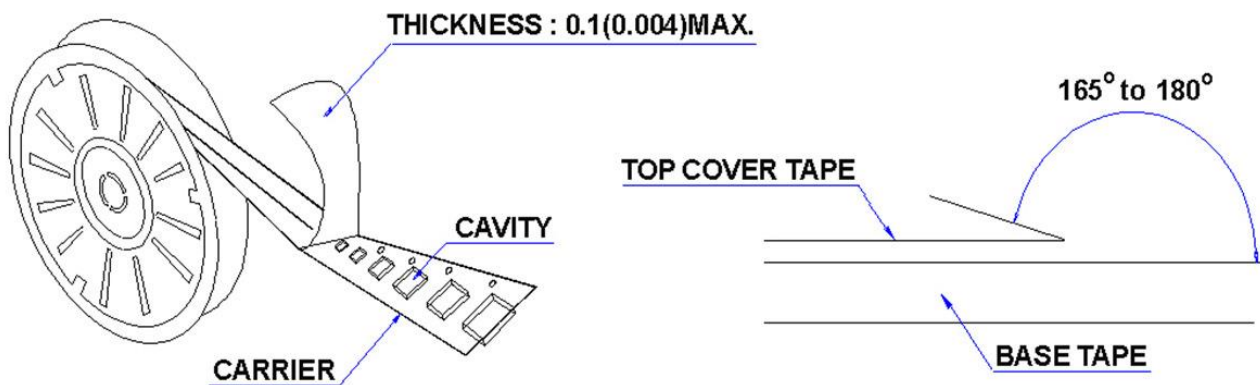

(6)-5 QUANTITY

2000 pcs/Reel

(6)-6 The products are packaged so that no damage will be sustained.

(7) ATTENTION IN CASE OF USING

In case of using product ,please avoid following matters:

Splashing water or salt water

Dew condenses

Toxic gas (Hydrogen sulfide, Sulfurous acid ,Chlorine, Ammonia)

Vibrations or shocks which exceed the specified condition

Please be careful for the stress to this product by board flexure or something after the mounting.

Please note that the contents may change without any prior notice due to reasons such as upgrading.