Application

Laptop, desktop and server applications High current power supplies Battery powered devices PMIC

Features

RoHS compliant & halogen free Low resistance and high current rating Magnetic core made by high performance magnetic metal powder

Product Identification

1	2	3	4	5
<u>MMD</u> -	<u>05AH</u>	N <u>4R7</u>	M	- <u>X2</u>

- ① Product Code
- ② Dimensions
- ③ Inductance: $4R7 = 4.7\mu H$
- ④ Tolerance: $M = \pm 20\%$
- ⑤ Series Type: X2 Type

Note: Please refer to the "Product Dimension" for detail dimensions.



Electrical Performance

Part number	Inductance ±20%@0A	Rdc (mΩ)		Heat rating current (Idc) ¹	Saturation current (Isat) ²
	(µH)	Тур.	Max.	DC amps (A)	DC amps (A)
MMD-05AHNR47M-X2	0.47	7.7	9.0	10.5	15.5
MMD-05AHNR56M-X2	0.56	8.0	10.0	9.5	15.0
MMD-05AHNR68M-X2	0.68	12.0	13.8	7.5	10.0
MMD-05AHN1R0M-X2	1.0	15.0	17.0	8.0	9.0
MMD-05AHN1R2M-X2	1.2	17.0	20.0	7.5	8.0
MMD-05AHN2R2M-X2	2.2	30.0	35.0	5.0	6.5
MMD-05AHN3R3M-X2	3.3	52.0	58.0	4.5	5.0
MMD-05AHN4R7M-X2	4.7	78.0	85.0	3.5	4.0
MMD-05AHN6R8M-X2	6.8	107	120	2.8	3.4
MMD-05AHN100M-X2	10.0	140	155	2.5	3.0


Test frequency: 100 KHz, 0.25V.

Test instruments: Inductance/saturation current: Keysight 4285A or equivalent. Rdc: ADEX AX1152D or equivalent.

Notes:


- 1. The heat rating current (Idc) will cause temperature rise approximate 40°C.
- 2. The saturation current (Isat) will cause initial inductance drop approximate 30%.
- 3. All test data is referenced at 25°C ambient.
- 4. Operating temperature range -55° C to $+125^{\circ}$ C.
- 5. The part temperature (ambient + temp rise) should not exceed 125°C under the worst condition.
- 6. The temperature of component is affected by application conditions, e.g. circuit design, copper thickness of PCB and cooling conditions, the actual component temperature should be tested in the end application.



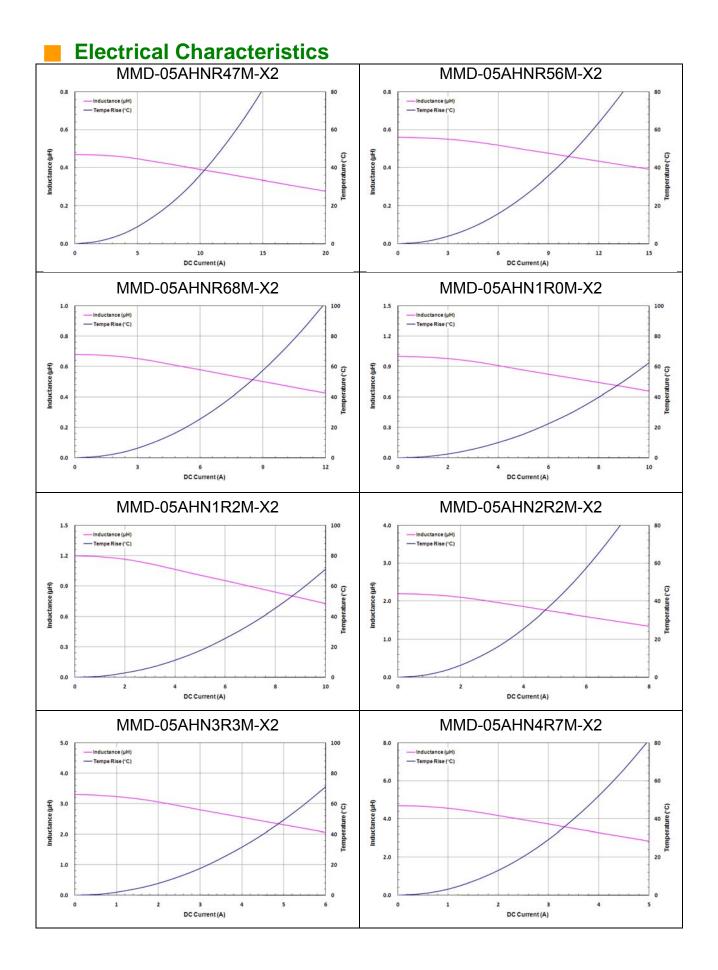




MMD-05AHNSERIES-X2

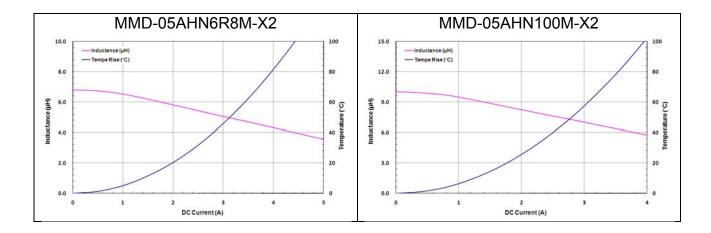



Product Dimension

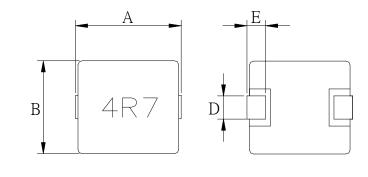


|--|

Dimension Part number	А	В	С	D	E
MMD-05AHNSERIES-X2	5.49 ± 0.25	5.18 ± 0.22	1.8 Max	2.0 ± 0.3	1.0 ± 0.3

Unit: mm



Recommended PCB Layout



Туре	05AH	
А	2.5	
В	2.2	
С	5.99	


Unit: mm

Safety precaution


- 1. Do not make any through holes and copper pattern in the dotted line area. Except a copper pattern to the electrode.
- 2. Don't design/mount any components in contact with this product.

This power choke coil itself does not have any protective function in abnormal condition such as overload, short circuit, open conditions and etc, it shall be confirmed as the end product that there is no risk of smoking, fire, dielectric withstand voltage, insulation resistance and etc. in abnormal conditions to provide protective devices and/or protection circuit in the end product.



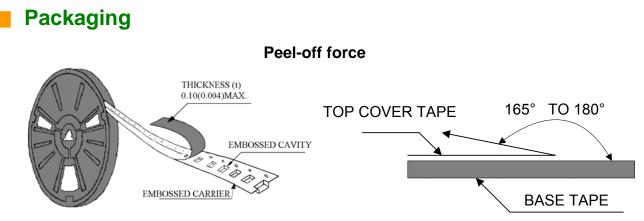


The peel off force of cover tape is 10 to 70 grams in the arrow direction.



Dimensions

Туре	А	В	С	D	E	F
330mm	330	100	20	13	12.4	17.4
	±2	±1	±0.5	±1.0	+2/-0	±2

Unit: mm

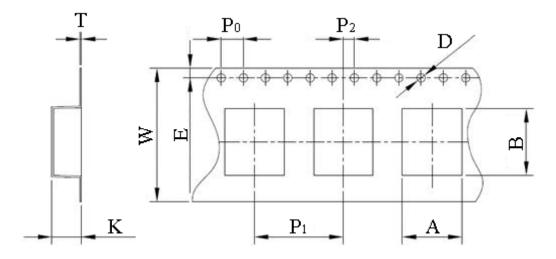


TYPE	SIZE	А	В	W	P ₁	K
		5.4±0.1	5.8±0.1	12.0±0.3	8.0±0.1	1.95±0.05
MMD	05AH	P ₀	P ₂	D	Е	Т
		4.0±0.1	2.0±0.1	1.5±0.1	1.75±0.1	0.3±0.05

Unit: mm



START

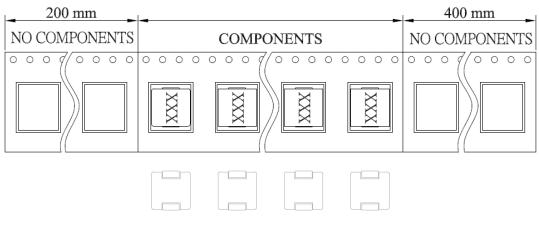



Taping quantity

Series	05AH
PCS/Reel	1000

Carton box

Middle packaging: 3 reels/box





External packaging: 5 boxes/carton

